

# 1300 E



[www.ommelift.com](http://www.ommelift.com)

## INCREASED OUTREACH MOUNTED ON TRAILER

OMME LIFT A/S – Lægårdsvej 4 – DK 7260 Sdr. Omme  
Phone: + 45 753 413 00 – Fax: + 45 753 415 92  
E-mail: [omme@ommelift.dk](mailto:omme@ommelift.dk) – Web: [www.ommelift.dk](http://www.ommelift.dk)


## OMMELIFT



Quality since 1906

# 1300 E

## Mounted on trailer

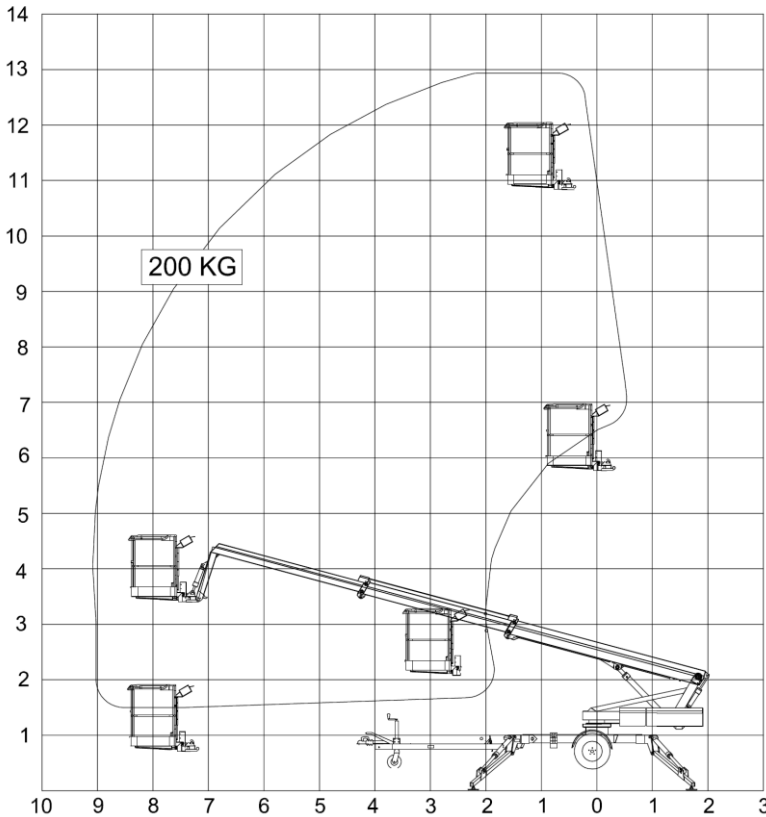

Technical data:	1300 E	1300 EB
Max. working height	12.80 m	
Max. outreach	9 m	
Max. basket load	200 kg	
Basket size	1.25x0.8x1.1m	
Turnable basket	± 50°	
Rotation	± 400°	
Power supply	230V-10A/16A	24V/139Ah/5h
Charger		24 V/30 A
Transport length	6.35 m	
Transport height	1.95 m	
Transport width	1.64 m	
Operational width	4.12 m	
Total weight	1700 kg	1745 kg
Controls	2-step	
Hydraulic stabilizers	Standard	
Propulsion with hydraulic coupling	Standard	
230 V outlet in basket	Standard	
Battery 24V/200Ah/5h	Option (+45 kg)	

## INCREASED OUTREACH



Angle boom



Propulsion



230 V outlet in basket



Easy transport

- 1300E and 1300EB are identical apart from their power sources. Standard features include hydraulic stabilizers and 2-step dual controls to ground and basket. Design features include a basket mounting that forms a "fly" boom mounted to the top boom section and gives increased outreach over roof edges or other obstacles.
- The specially designed steel booms made from high and broad profiles allow a great outreach with an exceptional degree of stability and rigidity.
- 1300E is mains powered 230 V and is especially suited, where continuous or extended operation is required.
- 1300EB is powered by a heavy duty (24V/139Ah/5h) battery pack with built in charger capable of charging the batteries whilst the platform is in use. Type 1300EB is especially suited for jobs, without mains access. As an option the lift can be delivered with increased battery capacity 24V/200Ah/5h.