

# 1930 RX



[www.ommelift.dk](http://www.ommelift.dk)

## CRAWLER MOUNTED BOOM PLATFORM

OMME LIFT A/S – Lægårdsvej 4 – DK 7260 Sdr. Omme  
Phone: + 45 753 413 00 – Fax: + 45 753 415 92  
E-mail: [omme@ommelift.dk](mailto:omme@ommelift.dk) – Web: [www.ommelift.dk](http://www.ommelift.dk)


## OMMELIFT



Quality since 1906

# 1930 RX

## Crawler Mounted

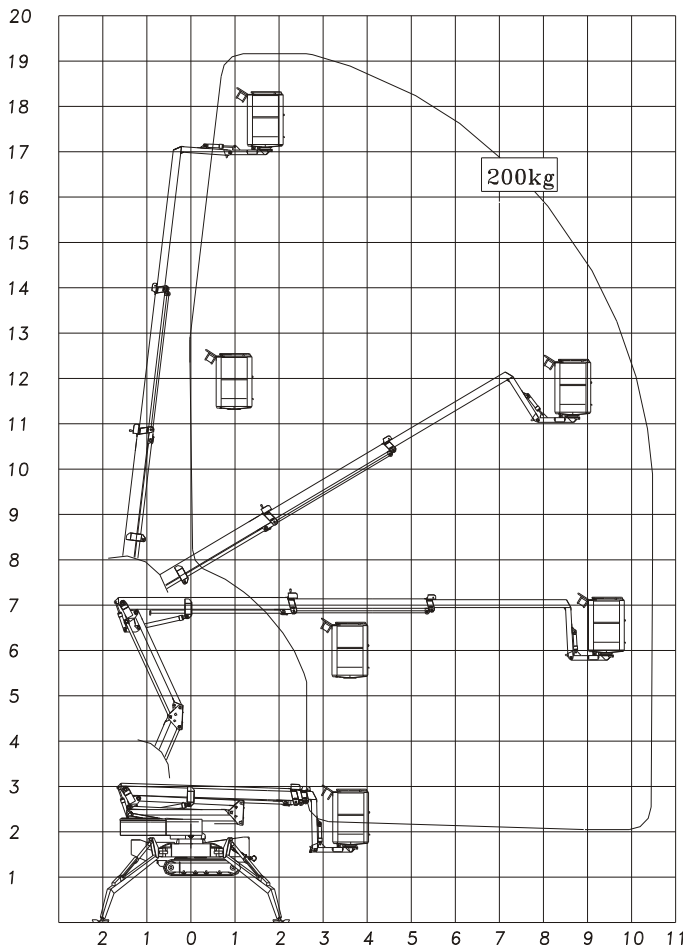

Technical Data:	1930 RXB	1930 RXBD
Max. working height	19.10 m	
Max. outreach	10.20 m	
Max. basket load	200 kg	
Basket size	1.25x0.8x1.1m	
Rotation	± 355°	
Battery	24V/400Ah/5h	24V/200Ah/5h
Charger	24 V/30 A	24 V/30 A
Diesel engine		14kW/18,8hp
Generator		24 V/22 A
Travelling length	5.90 m	
Travelling height	2.07 m	
Travelling width	1.10 m	
Operational width	4.60 /3.75 m	
Total weight approx.	3150 kg	3250 kg
Gradeability: Across slope up to	30% (16.7°)	
Up and down slope up to	35% (19.3°)	
Stabilization up to	40% (21.8°)	
Proportional controls	+	
230 V outlet in basket	+	
Transformer	O	
Wireless remote control	O	
Non-marking tracks	O	

+ Standard O Optional

## HIGH SPECIFICATION – HUGE OUTREACH



Outside



Inside



Easy set up



Gradeability

- Type 1930RXB and 1930RXBD are identical apart from the power sources. Standard features include hydraulic stabilizers, turnable basket and proportional controls. The adjustable stabilizer spread provides substantial reduction in operational width. The platforms are equipped with an unfolding scissor system, giving the lift an increased up and over outreach over high obstacles. When operating the scissor system up and down the basket will follow a vertical line. Furthermore the lift has no tail swing at rotation. Electric wiring to the basket and the telescopic cylinder is protected inside the telescopic boom. The specially designed steel booms made from high and broad profiles allow greater outreach whilst maintaining a high degree of stability and rigidity. Being short in travelling length the platform is extremely manoeuvrable in narrow places. The self-propulsion system is electronically operated by proportional levers comfortably placed in a light weight mobile control box.
- 1930RXB is powered by a heavy duty 24 v battery pack. In order to accommodate extreme and long term usage a transformer for direct mains connection is included. This type is especially suited for indoor operation.
- 1930RXBD is a battery and diesel engine bi-energy unit. This type is therefore suited for both indoor and outdoor usage. The diesel power pack provides an incredible gradeability of remarkable 35%, equivalent to 19.3°, an environment where lift deployment is also possible. Underlining the general stability is the easy self-propulsion manoeuvrability across a 30%(16,7°) slope. Combined with the strong, non-skid crawler belts this lift type is indeed go anywhere access.